

UNIVERSITY OF CINCINNATI

August 19, 19 99

I, Michael W. Landgraf,
hereby submit this as part of the
requirements for the degree of:

Master of Science

in Mechanical Engineering




It is entitled Kalman Filter Applications
for Industrial Fans

Approved by:

Dr. David Brown

Dr. Randall Allemang

Dr. Ivan Morse

Kalman Filter Applications for Industrial Fans

A thesis submitted to the

Department of Mechanical Engineering
College of Engineering

Division of Graduate Studies
University of Cincinnati

in partial fulfillment of the
requirement for the degree of

MASTER OF SCIENCE

1999

by

Michael W. Landgraf

B.S., Michigan State University 1992

ABSTRACT

The advancement of computer technology and portable FFT analyzers has allowed for implementation of more efficient techniques to determine the dynamic characteristics of rotating machinery and aid in problem solving procedures. Using parametric filtering algorithms, responses of the operating system can be tracked and extracted based on the instantaneous speed of the rotating components. This data can be used to output response spectra, system frequency response functions, and information used in balancing the rotating components.

The signal processing procedures will be developed in this thesis and applied to industrial fans common in the power industry.

PREFACE

I would like to begin by thanking Manta Corporation, for providing a professional and challenging engineering environment. My experience at Manta has played a crucial role in my development as an engineer and in the completion of this degree. In particular, I would like to thank Mike Carlier and Dan Morrow for their advice, support and friendship.

I deeply thank my family for providing lifelong love and encouragement to strive to be the best I can be. I especially thank my wife for her patience and support over the last seven years (I apologize for dragging this out for so long).

Last but not least, I would like to thank SDRL for providing an excellent educational environment. In particular I would like to thank David Brown, Randy Allemang, and Ivan Morse for there support and guidance over my career as a graduate student.

Table of Contents

Table of Contents	i
List of Tables and Figures	ii
List of Symbols	iii
1.0 INTRODUCTION	1
1.1 Background	5
1.1.1 <i>Fourier Transform Based Order Tracking</i>	5
1.1.2 <i>Computed Order Tracking</i>	6
1.1.3 <i>Kalman Filtering</i>	7
2.0 THEORY	8
2.1 RPM Estimation	8
2.2 Curve Fitting RPM Trace	11
2.3 Structure of Periodic Signals	12
2.4 Time Variant Zoom Transform	13
2.5 Kalman Tracking Filter	14
2.6 Response Spectra	16
2.7 Frequency Response Functions	17
2.8 Balancing	18
3.0 PROCEDURE	20
3.1 Simulation	21
4.0 APPLICATIONS	24
4.1 Response Spectra	24
4.1.1 <i>Example 1</i>	24
4.1.2 <i>Example 2</i>	27
4.1.3 <i>Example 3</i>	28
4.2 Frequency Response Functions	30
4.2.1 <i>Example 4</i>	30
4.3 Balancing	31
4.3.1 <i>Example 5</i>	31
4.3.2 <i>Example 6</i>	33
5.0 SUMMARY	35
5.2 Recommendations for Future Work	35
References	37

List of Tables and Figures

Figure 1.0.1: Typical setup of coal-fired electric generating plant	2
Figure 1.0.2: Shaft and impeller assembly used in industrial fans	3
Figure 1.0.3: Typical fan housing and supporting structure (PA fan)	3
Figure 1.0.4: Schematic representation of industrial fan	4
Table 1.0.1: Typical characteristics of industrial fans	4
Figure 2.1.1: Tachometer signal	9
Figure 2.1.2: Linear interpolation for time approximation	9
Figure 2.1.3: Results of RPM estimation on coastdown data	10
Figure 2.2.1: Curve fit of estimated RPM data	12
Figure 3.0.1: Test equipment; (a) HP35670A FFT analyzer, (b) Triax accelerometer block, (c) Tachometer and reflective tape	20
Figure 3.1.1: First order response of imaginary system	21
Figure 3.1.2: Generated sine wave response and RPM profile	22
Figure 3.1.3: Response signal with added harmonics and noise	22
Figure 3.1.5: Comparison of original and calculated 1st order phase/amplitude information ...	23
Figure 4.1.1: Coastdown response of tachometer signal and lateral bearing acceleration	25
Figure 4.1.2: Extracted section of coastdown data	25
Figure 4.1.3: Spline fit of tachometer data	26
Figure 4.1.4: Comparison of Kalman filtered data to the original data	26
Figure 4.1.5: Coastdown response amplitude and weighting factor effect	27
Figure 4.1.6: Coastdown results of lateral vibration on the inboard and outboard bearings	28
Figure 4.1.7: First order Kalman filter results for PA fan coastdown	29
Figure 4.1.8: Second order Kalman filter results for PA fan coastdown	30
Figure 4.2.1: Calculated stiffness of fan bearing	31
Figure 4.3.1: First order coastdown of inboard and outboard bearing response	32
Figure 4.3.2: Weight and phase of fan unbalance	33
Figure 4.3.3: First order coastdown amplitudes of inboard and outboard bearings (PA fan) ...	34


List of Symbols

RPM	revolutions per minute
t	time variable
i,k,n,j	counter index
ω	angular velocity (radians/sec)
a	amplitude of sinusoid
P,X,Y,x,y	amplitude in time domain
F	force
π	3.141592654
I	Identity matrix
B	bidiagonal Kalman filter matrix
γ	error term for Structure Equation
e	error term for Data Equation
w	weighting factor
m	mass
r	radius
FFT	Fast Fourier Transform
g	gravity
Hz	Hertz

1.0 INTRODUCTION

Industrial applications of signal processing techniques are often accompanied by limitations associated with the operating environment. The power industry, in general, is governed by plant outages, during which time routine maintenance is performed and any structural problems are addressed. Depending on power demands, a typical power plant can lose upwards of 200,000 dollars a day during an outage, so it is in the plants best interest to minimize down time. This limitation calls for efficient, reliable techniques to evaluate and solve problems associated with the plants performance. Figure 1.0.1 depicts a typical setup of a coal-fired electric generating plant. To maximize the efficiency of the power generating process, a system of fans and pumps are used to maintain the required air and water flow throughout the plant. Due to the extreme heat and gasses generated by the combustion process, the fans are exposed to a corrosive operating environment which can cause the fan to become unbalanced. If left unattended, the forces generated by the unbalance can begin to deteriorate the bearings as well as the supporting structure of the fan, including the foundation. Figure 1.0.2 shows an example of the type of shaft and impeller used in the fans, this particular impeller is from a Primary Air Fan (PA Fan). Figure 1.0.3 shows a typical fan housing and supporting structure and Figure 1.0.4 is a typical schematic representation of a fan assembly. Much attention is placed on the interfaces of the structure, such as the connections between the bearing and the steel pedestal, the steel pedestal and the sole plate, and the sole plate and the concrete pier. Deterioration of these areas of the structure can cause a loss in stiffness which results in lower modal frequencies of the system. When designing the supporting fan structure, modal frequencies are typically kept 20 % above or below the operating range of the fan and problems commonly arise when the natural frequencies are shifted toward the operating range. To get a feel for the operating environment and dimensional characteristics of the fans, Table 1.0.1 lists some of the typical characteristics of the industrial fans used.

Historically, measurements made on rotating machinery during operation have been difficult due to noise that contaminates the signal. Many times this noise significantly masks the

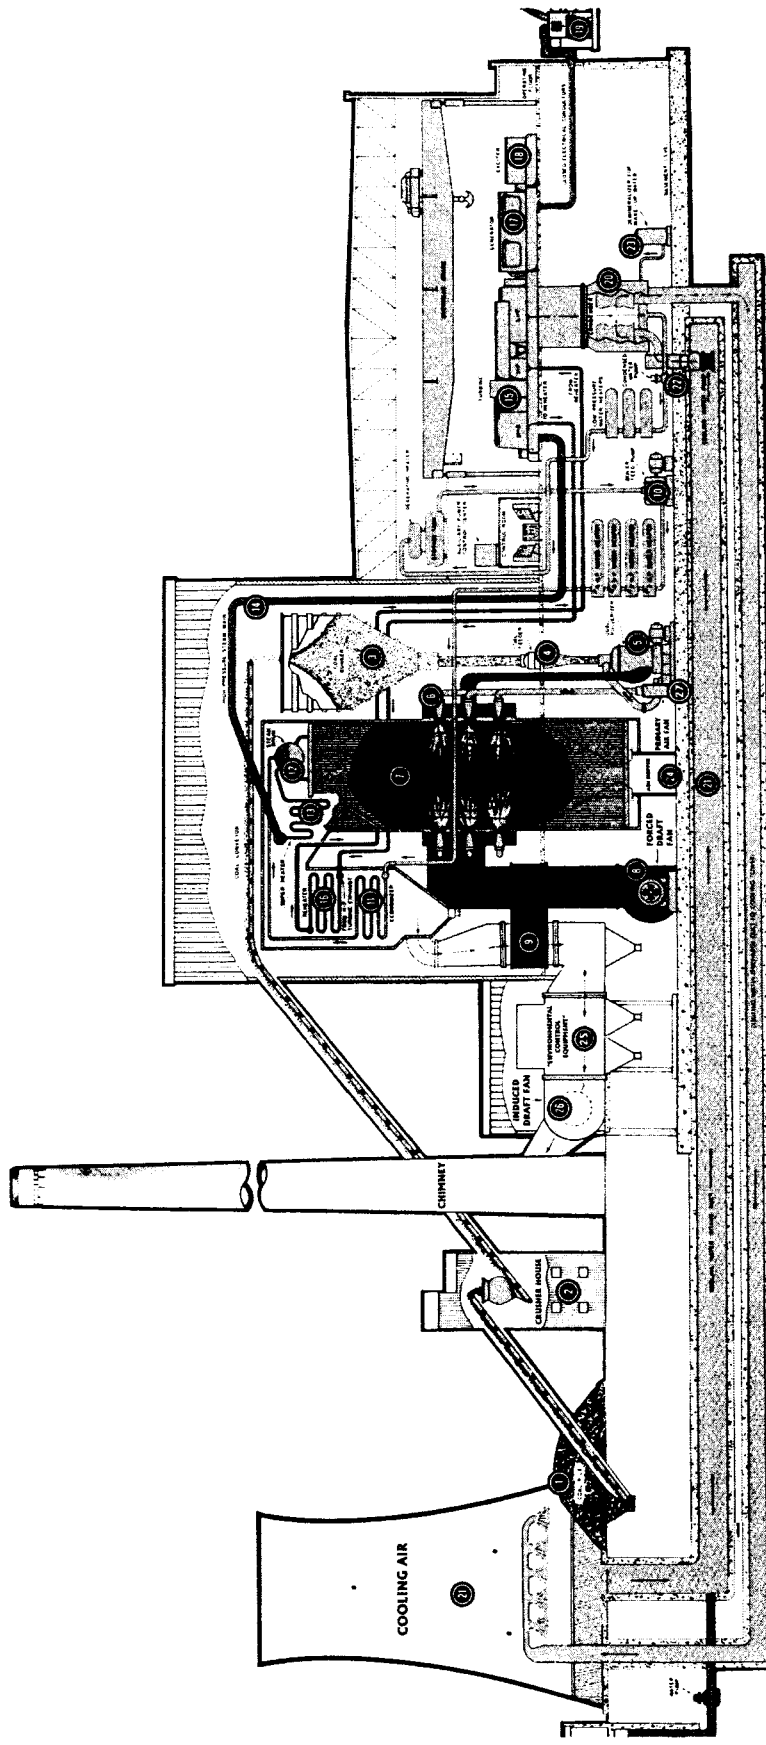

- | | | | |
|-------------------|-----------------------------|------------------------|------------------------------------|
| 1 Coal Pile | 8 Forced Draft Fan | 15 Turbine | 22 Condensed Water Pump |
| 2 Crusher House | 9 Air Heater | 16 Reheater | 23 Demineralized for Make-up Water |
| 3 Coal Bunker | 10 Boiler Feed Pump | 17 Generator | 24 Ash Hopper |
| 4 Coal Feeder | 11 Economizer | 18 Exciter | 25 Environmental Control Equipment |
| 5 Coal Pulverizer | 12 Steam Drum | 19 Step-up Transformer | 26 Induced Draft Fan |
| 6 Coal Burners | 13 Superheater | 20 Condenser | 27 Primary Air Fan |
| 7 Boiler | 14 High Pressure Steam Main | 21 Cooling Tower | |

Figure 1.0.1: Typical setup of coal-fired electric generating plant

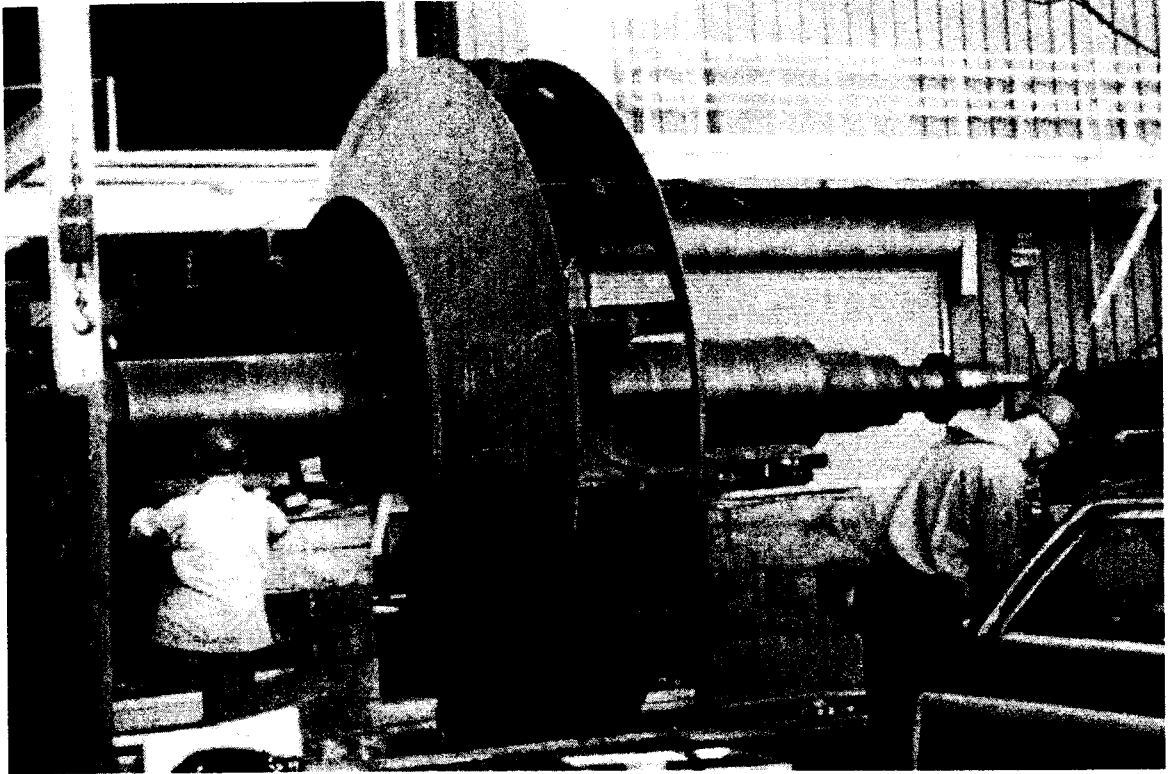


Figure 1.0.2: Shaft and impeller assembly used in industrial fans

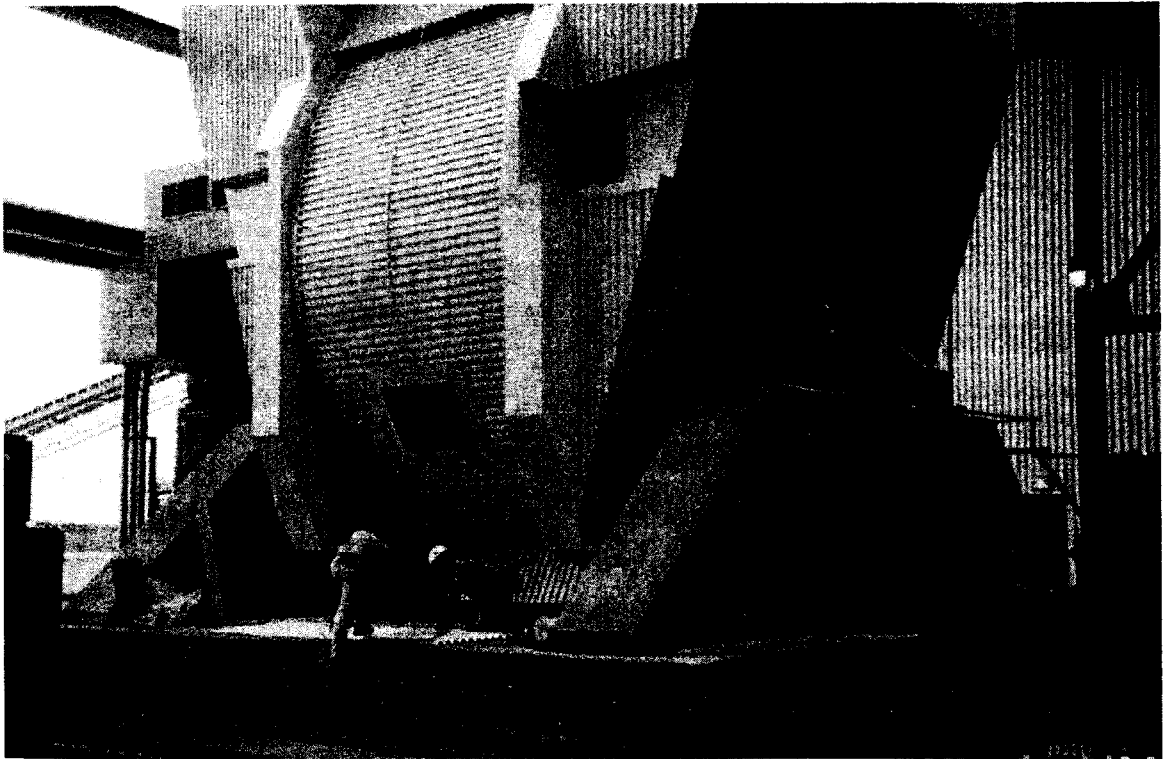


Figure 1.0.3: Typical fan housing and supporting structure (PA fan)

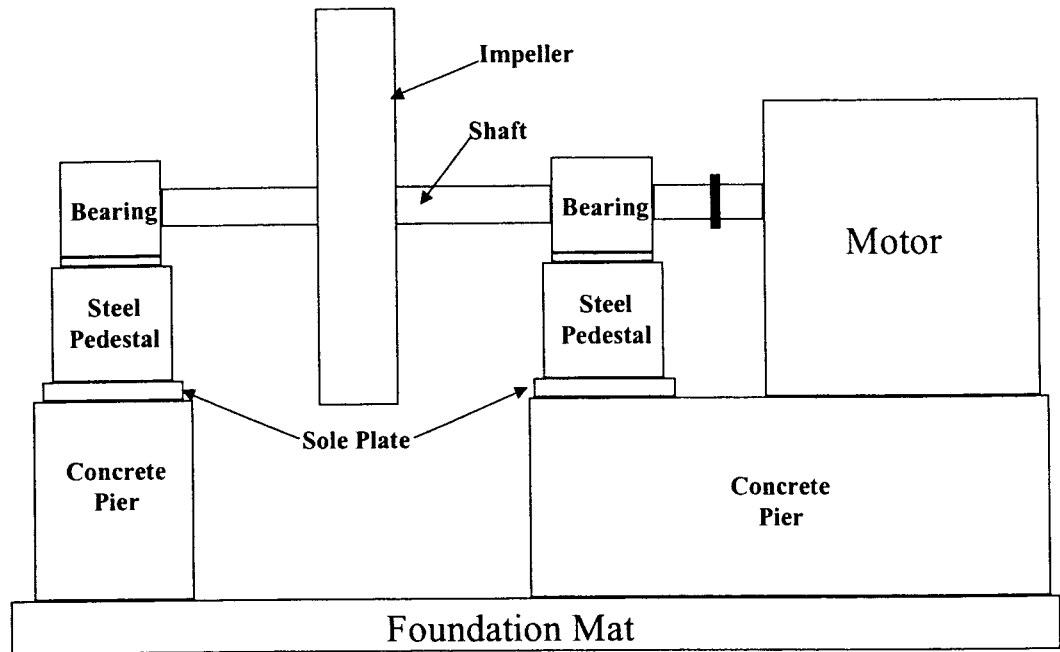


Figure 1.0.4: Schematic representation of industrial fan

Table 1.0.1: Typical characteristics of industrial fans

Fan Type	Diameter (inches)	Speed (RPM)	Function
Primary Air Fan	80-100	720-1200	Supplies air mixed with coal dust into the combustion chamber
Forced Draft Fan	120-140	720-1200	Air for the combustion process originates at the forced draft fan
Induced Draft Fan	120-140	720-1200	Draws gasses from the fly ash collector and discharges them into the chimney

response signal of interest and has traditionally been difficult to overcome to allow for an accurate measurement. For industrial fans it is desirable to take measurements during operation in order to discount any change in dynamic characteristics that may occur between operating and static conditions. In particular, changes in the effective boundary conditions applied by the stiffness of the hydrostatic bearings need to be taken into account.

1.1 Background

Signals measured on rotating systems are typically related to the speed of the rotating components, which in this case is the impeller/shaft assembly. For this type of signal the spectral components appear as harmonics of the fans' fundamental frequency of rotation. To allow for change in the fan speed, it is the signal processing objective to track the amplitude and phase of each order as a function of RPM, this process is referred to as order tracking. A number of order tracking techniques are available today that range in complexity from simple FFT based techniques to more advanced adaptive filtering algorithms that can be computationally demanding and often proprietary.

In general, order tracking algorithms rely on transformations made in either the time/frequency or the angle/order domain. The simplest is the time/frequency domain techniques where data is collected with a constant Δt . To work in the angle/order domain, data must be sampled at a constant $\Delta\theta$, where θ represents the angle of rotation. To produce such data, time domain data may be digitally resampled to obtain angle domain measurements, or angle domain data can be recorded explicitly through the use of an encoder or ratio synthesizer used to drive a sample clock. The more traditional forms of order tracking are outlined in the following two sections.

1.1.1 *Fourier Transform Based Order Tracking*

The simplest method of order tracking involves performing Fourier transforms on blocks of time domain data. The results of this procedure are typically viewed as a spectral waterfall or contour plots in which a global view of the response can be examined. The accuracy of the

